

# DIGI

SECURE  
ENTERPRISE-READY  
CELLULAR EXTENDER

Manage this device with  
Digi Remote Manager



## DIGI EX15

Branch connectivity in a compact, affordable, all-in-one solution

Digi EX15 LTE cellular extenders offer gigabit Ethernet and Wi-Fi connectivity for retailers and other organizations that cannot tolerate network downtime and the negative impact on revenue streams and brand reputation.

A suite of upgradeable Digi CORE® plug-in LTE modems lets users select the cellular speeds that best fit their business requirements, including LTE Cat 4, LTE-Advanced Cat 6 and LTE-Advanced Cat 11 for data-intensive applications.

Combine a Digi EX15 with a dedicated wireline connection to ensure dual ISP connectivity, maximum uptime and complete business continuity for devices that must be “always on,” such as mobile kiosks, digital signs and POS systems.

You can use Digi EX15 for primary LTE connectivity, in addition to dual-connectivity/failover. Additionally, the serial port can provide out-of-band (OOB) management for remote, off-premise equipment.

Digi device management applications provide easy setup, configuration and support for Digi devices. Digi Remote Manager® offers secure, web-based device management for network visibility and control over your Digi enterprise routers and gateways after deployment. For fast and easy installations, a site survey battery, PoE injector and mounting accessories are included for proper placement based on optimal signal strength.

### FEATURES AND BENEFITS

- LTE-certified Digi CORE plug-in modem
- Scalable cellular technology allows you to match speeds to applications and future proof your network
- Optimized connectivity to any Ethernet device
- Battery pack for site survey to identify optimal signal strength placement
- Multiple mounting options and accessories
- Serial port for remote, out-of-band management
- Securely deploy, monitor and control devices with Digi Remote Manager
- Zero-touch provisioning and cloud management

### RELATED PRODUCTS



Digi 6310-DX



Digi 6330-MX



Digi CORE plug-in  
LTE modem




Digi IX14




Digi Remote  
Manager

### APPLICATION EXAMPLE

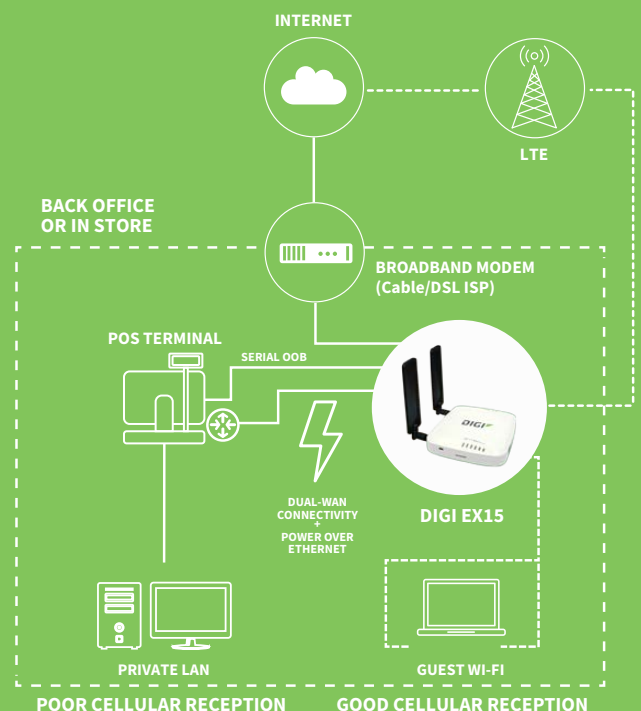

SPECIFICATIONS		DIGI® EX15	
CELLULAR CONNECTIVITY			
DIGI CORE® PLUG-IN LTE MODEMS	LTE Cat 4 (US): B2, B4, B5, B12, B13; 3G: B2, B5; Transfer rate (max): 150 Mbps down, 50 Mbps up		
	LTE Cat 4 (EU): B1, B3, B7, B8, B20; 3G: B1, B8; 2G: B3, B8; Transfer rate (max): 150 Mbps, 50 Mbps up		
	LTE-A Cat 6 (GLB): B1, B2, B3, B4, B5, B7, B8, B12, B13, B20, B25, B26, B29, B30, B41; WCDMA: B1, B2, B3, B4, B5, B8; Transfer rate (max): 300 Mbps, 50 Mbps up		
	LTE-A Cat 11 (GLB): LTE FDD: B1, B2, B3, B4, B5, B7, B8, B12, B13, B17, B20, B25, B26, B29, B30, B66; LTE TDD: B38, B40, B41; 3G: B1, B2, B4, B5, B8; Transfer rate (max): 600 Mbps, 75 Mbps up		
CONNECTORS	(2) 50 Ω SMA (center pin: female)		
SIM SLOTS	(2) Mini-SIM (2FF); software selectable and hardware switchable		
SOFTWARE AND MANAGEMENT			
REMOTE MANAGEMENT	Digi Remote Manager®; SNMP v3 (user installed/managed), encrypted SMS		
LOCAL MANAGEMENT	WebUI (HTTP/HTTPS); CLI (SSH, serial port)		
PROTOCOLS	RIP, RIPng, OSPFv2, OSPFv3, BGP, Babel, IS-IS		
MANAGEMENT / TROUBLESHOOTING TOOLS	FTP client, SCP; protocol analyzer with PCAP for Wireshark; event logging with Syslog and SMTP client; NTP/SNTP		
MEMORY	256 MB RAM, 512 MB flash		
ETHERNET			
PORTS	(2) RJ-45; 10/100/1000 Mbps (auto-sensing)		
WI-FI (OPTIONAL)			
CONNECTIVITY	2 x 2 MIMO 2.4/5 GHz: 802.11 b/g/n 2.4 GHz; 802.11 n/a/ac 5 GHz		
SERIAL			
PORTS	(1) RS-232 (RJ-45)		
PHYSICAL			
DIMENSIONS (L x W x H)	142 mm x 128 mm x 31 mm (5.6 in x 5.0 in x 1.2 in)		
WEIGHT	0.2 kg (7.0 oz)		
STATUS LEDs	LAN (link = solid, flashing = act), WAN (link = solid, flashing = act), LTE, 5 signal, SIM 1 and 2 LEDs		
ENCLOSURE	Plastic		
POWER REQUIREMENTS			
POWER INPUT	18 VDC 1 A		
OTHER	includes PSU, antennas, and remote mounting kit: temporary battery, passive PoE injector, mounting bracket and accessories		
ENVIRONMENTAL			
OPERATING TEMPERATURE	0° C to 40° C (32° F to 104° F)		
RELATIVE HUMIDITY	5% to 95% (non-condensing)		
APPROVALS			
CELLULAR	PTCRB; US: AT&T, Verizon; Canada; Europe		
EMISSIONS / IMMUNITY	FCC Part 15, Subpart B, Class A; CE, RCM; CAN ICES-3(B)/NMB-3(B)		
WARRANTY			
PRODUCT WARRANTY	3-year		

## PRODUCT IMAGES

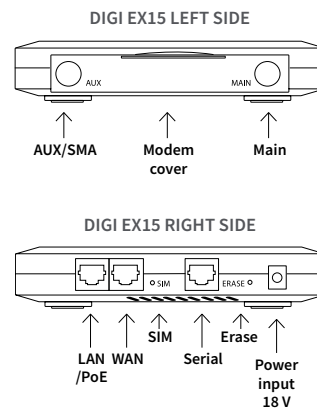

## DIGI REMOTE MANAGER®



### CAPABILITIES

- Centralized management of remote devices over 3G/4G/LTE
- Define standard configurations and automatically monitor individual devices for PCI security compliance
- Get alerts and create reports on performance statistics, including connection history, signal quality, latency, data usage and packet loss
- No servers or applications to operate and maintain
- Perform tasks across your entire device network in minutes
- Edit configurations and update firmware for individual devices or groups
- Monitor the status and location of remote devices via a web browser
- Activate or deactivate cellular lines and monitor data to ensure you never incur overage charges

### INFRASTRUCTURE

- Hosted in a commercial-grade SAS 70-certified environment
- Superior availability, operating to 99.9% or greater
- Open APIs available to support application development

### SECURITY

- Certified SSAE-16 facilities
- Over 175 security controls in place to protect your data
- Enables compliance with security frameworks like PCI, HIPAA, NIST
- Earned SkyHigh's Cloud Trust Program highest rating of Enterprise-Ready

PART NUMBERS	DIGI EX15
ASB-EX15-XX04-OUS	Digi EX15: 2-port GigE; RJ-45, RS-232, No Wi-Fi; LTE / HSPA+ Cat 4; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada
ASB-EX15-XXE4-GLB	Digi EX15: 2-port GigE; RJ-45, RS-232, No Wi-Fi; LTE / HSPA+ Cat 4; Cellular certifications: PTCRB, Europe
ASB-EX15-XX06-GLB	Digi EX15: 2-port GigE; RJ-45, RS-232, No Wi-Fi; LTE-A / HSPA+ Cat 6; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada, Europe
ASB-EX15-XX11-OUS	Digi EX15: 2-port GigE; RJ-45, RS-232, No Wi-Fi; LTE-A / HSPA+ Cat 11; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada
ASB-EX15-XX11-GLB	Digi EX15: 2-port GigE; RJ-45, RS-232, No Wi-Fi; LTE-A / HSPA+ Cat 11; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada, Europe
ASB-EX15-WX04-OUS	Digi EX15: 2-port GigE; RJ-45, RS-232, Wi-Fi; LTE / HSPA+ Cat 4; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada
ASB-EX15-WXE4-GLB	Digi EX15: 2-port GigE; RJ-45, RS-232, Wi-Fi; LTE / HSPA+ Cat 4; Cellular certifications: PTCRB, Europe
ASB-EX15-WX06-GLB	Digi EX15: 2-port GigE; RJ-45, RS-232, Wi-Fi; LTE-A / HSPA+ Cat 6; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada, Europe
ASB-EX15-WX11-OUS	Digi EX15: 2-port GigE; RJ-45, RS-232, Wi-Fi; LTE-A / HSPA+ Cat 11; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada
ASB-EX15-WX11-GLB	Digi EX15: 2-port GigE; RJ-45, RS-232, Wi-Fi; LTE-A / HSPA+ Cat 11; Cellular certifications: PTCRB, AT&T, Verizon, US, Canada, Europe

PART NUMBERS	DIGI CORE® PLUG-IN LTE MODEMS
ASB-1002-CM04-OUS	Digi CORE plug-in LTE modem; LTE / HSPA+ Cat 4; Cellular certifications: PTCRB, AT&T, Verizon, Canada
ASB-1002-CME4-GLB	Digi CORE plug-in LTE modem; LTE / HSPA+ Cat 4; Cellular certifications: PTCRB, RED, Europe
ASB-1002-CM06-GLB	Digi CORE plug-in LTE modem; LTE-A / HSPA+ Cat 6; Cellular certifications: PTCRB, RED, AT&T, Verizon, Canada, Europe
ASB-1003-CM11-GLB	Digi CORE plug-in LTE modem; LTE-A / HSPA+ Cat 11; Cellular certifications: PTCRB, RED, AT&T, Verizon, Canada, Europe

PART NUMBERS	ACCESSORIES
450061	18 V PSU power supply with barrel jack connector (replacement)
500157	Cable assembly passive POE power injector, white 2.1 mm barrel connector (replacement)
560083	Temporary site survey battery pack, 9 V with 152.4 mm power lead, 2.1 mm barrel connector (replacement)
170011	(1) Antenna extender: 48 mm circle antenna magnetic base (base connector: SMA jack); cable: low loss CLF; 50 cm length with SMA plug (replacement for optional Wi-Fi enabled models)
170017	(2) Cellular antenna (replacement)

**FOR MORE INFORMATION  
PLEASE VISIT** [www.eproteca.com](http://www.eproteca.com)

Tel.: +506 2280-1686 • Fax: +506  
2524-2397 [ventas@eproteca.com](mailto:ventas@eproteca.com) • [www.eproteca.com](http://www.eproteca.com)

