


CONDUCTORES DE ALUMINIO

CONDUCTORES DE ALUMINIO

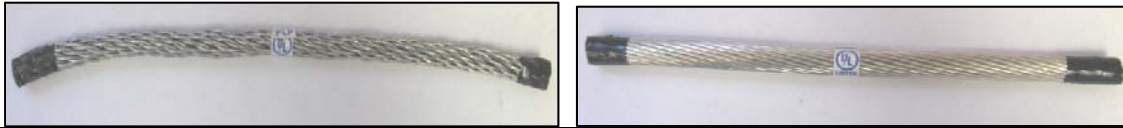

Parte #	AWG	CONFIGURACIÓN DE HILOS	NO. DE HILOS	DIÁMETRO DE HILO	HILO AWG	DIÁMETRO in.(mm)	LBS POR 1000 FT	CIRCULAR MILLS
A50	LP Class I	Tejido Suave	24	.065"	14	0.413(10.50)	98	98,640
A51	1/0	Tejido Suave	26	.065"	14	0.432(11.00)	103	109,850
A52	1/0	Tejido Suave	28	.065"	14	0.491(12.50)	109	118,300
A53	2/0	Tejido Suave	32	.065"	14	0.527(13.40)	124	135,200
A54	Class II	Trenzado cuerda	31	.081"	12	.629 (16.00)	197	203,391
A55	4/0 or LP Class II	Concéntrico	37	.0757"	12-1/2	0.523(13.30)	204	211,700

CONDUCTORES SECUNDARIOS DE ALUMINIO



Parte #	AWG	CONFIGURACIÓN DE HILOS	NO. DE HILOS	DIÁMETRO DE HILO	HILO AWG	DIÁMETRO in.(mm)	LBS POR 1000 FT	CIRCULAR MILLS
A62	#4	Concéntrico	10	.065"	14	.228(5.80)	41	42,200
A63	#2	Tejido Suave	16	.065"	14	--	62	67,600
A64	#4	Sólido	1	.2044"	4	0.204(5.18)	40	41,740
A65	#2	Sólido	1	.2577"	2	0.257(6.55)	60	66,360

Todos los conductores en esta página están Listados UL 96

