

EPROTECA

AIR TERMINALS

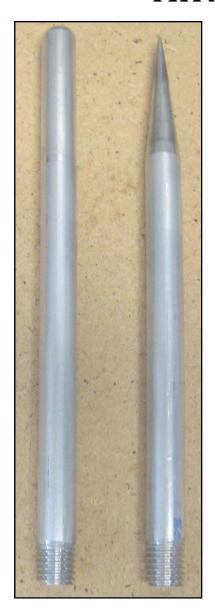



Aluminum, Copper or Stainless Steel rod. Air terminals can be ordered with a standard 2" taper or safety tipped. All air terminals are numbered for easy ordering. **UL Listed**

DESCRIPTION FOR ORDERING

First two numbers-Designates air terminal diameter.

Second two numbers—Designates air terminal length.

Prefix A-Designates Aluminum.

Prefix C– Designates Copper.

Prefix S– Designates Stainless.

Suffix L– Designates Lead Dipped.

Suffix N- Designates Nickel Plated.

Suffix ST– Designates Safety Tipped.

Suffix LC- Designates 1/16" Lead Coated.

Examples:

Aluminum 1/2" X 12" Air Terminal A1212 C3824ST

Copper 3/8" X 24" Safety Tipped

Air Terminal

C1236LST Copper 1/2" X 36" Leaded Safety

Tipped Air Terminal

Field bends are permissible but must not exceed 90 degrees or have a radius of bend less than 8 inches.

All air terminals over 24" in length -Refer to catalog numbers G150 thru G166 for proper bracing.

Preferred Lightning Protection 2100 East First Street Maryville, MO 64468



