

PSL



Low-Cost, High-Precision Power Quality & Energy Monitoring



PQube[®] power quality & energy analyzer

- AC and DC Monitoring
- Lab-Grade Accuracy
- Modular & Embeddable
- Plug-and-Play Functionality
- Direct Remote Communication
- No Software Required**





General

- Three-phase, single-phase and split-phase* monitoring 100~690V, 50/60/400Hz.
- Self-configuration—auto-detects single-phase, 3-phase, phase-to-phase, delta, wye, corner ground, nominal voltage, nominal frequency, and more.
- Two analog inputs, one digital input, up to 4 relay outputs, two temperature-humidity channels.
- Direct connect to 100~690V—no PTs required.
- Powers from 24 VAC, 24~48VDC, or 100~240 VAC with optional PS1 plug-in module.
- Built-in, self-rechargeable Li-Ion UPS with 10 minutes of backup power.
- Full color organic LED display, 28+ built-in languages.
- DIN-rail or optional panel mount bracket.

Power Quality Monitoring

- High-speed 256-samples-per-cycle recording.
- Power quality disturbances recorded with waveforms and RMS graphs.
- Over-frequency and under-frequency events, 1 micro-second high-frequency impulse detection, time-triggered snapshots.
- Voltage THD, current TDD and current THD*; voltage and current unbalance; VARs (fundamental* and Budeanu); VAR-hr accumulator*; flicker* (Pinst, PST, PLT).
- Voltage and current harmonics and interharmonics—up to the 63rd, with statistics.
- Daily, weekly, monthly trends. Cumulative probability, histograms, and more.

*New feature in firmware version 2.0

Energy (with current module)

- Watts, VA, VARs, True Power Factor, watt-hours, VA-hours.
- Carbon footprint meter (in kg), CO₂ generated and avoided
- Peak averages—single-cycle, 1-minute and 15-minute, and at user-selected intervals.
- CT ratios support up to 50,000 amps; PT ratios support up to 6,900,000 volts.
- Daily, weekly, monthly trends; load duration curves and more.
- Energy accumulators—daily, weekly, monthly.

Communication (with ethernet module)

- Direct remote access to built-in web server—NO SOFTWARE REQUIRED.
- Instant email notification after a power quality disturbance.
- Free email account.
- Modbus-TCP—read meters with any client, anytime.

Compliance

- Safety: UL, TUV, ISA-82.02.01 (IEC 61010-1 MOD), CAN/CSA-C22.2 NO.61010-1, Japan S-mark, GS.
- Immunity: IEC 61000-4-5 (6kV peak 100kHz surge), IEC 61000-4-4 (4kV peak EFT bursts), IEC 61000-4-2 Level 1 and MIL-STD-883 (electrostatic discharges), IEC 61000-4-3 (radio frequency fields), IEC 61000-4-8 (magnetic fields).
- Emissions: EN 55022 and CISPR 22, radiated and conducted RF emissions.
- Accuracy: Full NIST-trace certificate for each PQube.



PQube front terminals

Actual size



PQube back terminals



	Detects All Power Quality Disturbances	Modular & Embeddable	AC and DC	Temperature & Humidity	Remote Access (FTP, SMTP, Modbus, Email)	PQDIFs	Peak & Accumulated Energy	400 Hz Monitoring	Optional Network Connection	690 VAC	No Software	Self-Configuring	Open Source Files	Multilingual
 Semiconductor	✓	✓					✓		✓		✓	✓	✓	✓
 Medical	✓	✓									✓	✓	✓	✓
 Transportation	✓		✓		✓			✓			✓	✓		✓
 Government	✓				✓			✓			✓	✓	✓	✓
 Manufacturing	✓	✓			✓						✓	✓	✓	✓
 Wind & Solar	✓		✓	✓			✓			✓	✓			✓
 Energy Research	✓		✓	✓	✓		✓				✓			✓
 Data Centers	✓		✓	✓	✓						✓			✓
 Telecom	✓		✓	✓	✓						✓			✓
 Utilities	✓		✓		✓	✓	✓				✓			✓

PQube Applications



Current Sensing Modules

CT4



XCT4



XCT5



- Up to five channels of current monitoring, includes neutral and earth.
- Simple-to-set CT ratios in your PQube (up to 50 kiloAmps).
- Crest factor of 350%.
- Current waveforms, inrush current.
- Power/energy (kW, kWh, kVA, kVAh, kVAR, kVARh, tPF).
- Measure unbalance, harmonics, and interharmonics for current.
- Peak meters—peak amps, peak kVA, and peak watts. Single-cycle, 1-minute, and 15-minute peaks. Useful for sizing circuit breakers, UPSs, and transformers.
- Carbon footprint meter—input your local electric power source information, and your PQube automatically measures your CO₂ footprint directly in kilograms.

CT4 Current Sense module

- Just pass wires through openings in module (0.34in [8.6mm] maximum diameter)
- Part Number CT4-20A-00 for 20A nominal rating
- Part Number CT4-50A-00 for 50A nominal rating

XCT4 Current Transformer Interface module

- Connects directly to current transformer secondary wires—1A or 5A
- Part Number XCT4-01A-00 for CTs with 1A output
- Part Number XCT4-05A-00 for CTs with 5A output

XCT5 Current Transformer Interface module

- Connects directly to voltage secondary wires of your CTs—1V, 5V, or 10V.
- Part Number XCT5-0.333V-00 for CTs with .333V output
- Part Number XCT5-01V-00 for CTs with 1V output
- Part Number XCT5-05V-00 for CTs with 5V output
- Part Number XCT5-10V-00 for CTs with 10V output
- Current transformers with .333V output available from www.powerstandards.com

Network Connectivity Modules

ETH1 Ethernet module

- Automatically sends you an email whenever a disturbance occurs, complete with picture and Excel®-compatible attachments.
- Built in web server.
 - See status of your PQube and look at event and trend recordings.
 - Update your firmware and reset your PQube remotely.
- Free email account with each PQube.
- Use SNTP for synchronizing to UTC time standard.
- DHCP/Fixed IP, POP, SMTP, FTP, Modbus-over-TCP.
- Part Number ETH1-10T-00


CTE1 Combined Current and Ethernet module

- ETH1 ethernet module and XCT5 current module in a single package.
- Smaller footprint—ideal for panel mounting where space is limited.
- Part Number CTE1-10T-0.333V-00 for 0.333V nominal rating
- Part Number CTE1-10T-1V-00 for 1V nominal rating
- Part Number CTE1-10T-5V-00 for 5V nominal rating
- Part Number CTE1-10T-10V-00 for 10V nominal rating





Power Supply Modules



PS1 Power Supply module

- Power your PQube from 100V~240V, 50/60 Hz. (Your PQube takes power from 24VAC, 24VDC~48VDC without any optional modules.)
- Snap multiple PS1 modules together for redundant power from different feeders.
- Part Number PS1-100~240-00

PS2 Power Supply module

- Power your PQube from 100V~240V, 50/60 Hz.
- 24VDC output for powering external accessories.
- Part Number PS2-100~240-00

Temperature and Humidity Probe



TH1 Temperature/Humidity probe

- Monitors ambient temperature and humidity.
- Every PQube accepts two electrically isolated probes.
- Use one probe for local ambient temperature/humidity, and put the other on an optional 10-meter extension cable for monitoring remote conditions.
- Temperature accuracy: Typical: $\pm 0.5^{\circ}\text{C}$
- Humidity accuracy: Typical: $\pm 4.5\% \text{RH}$ (20~80% R.H.)
- Part Number TH1-80C-00

DC Monitoring Modules



ATT1—DC Voltage Monitoring

- For high voltage DC monitoring.
- Measure 1 differential voltage or 2 voltages relative to earth available.
- Part Number ATT1-0600V-00 for 600V nominal rating
- Part Number ATT1-1200V-00 for 1200V nominal rating

ATT2—DC Power and Energy

- For DC power and energy monitoring.
- Measures DC voltage (up to 600V).
- Measures DC current (with Hall effect sensors).
- Part Number ATT2-0600V-00
- DC current sensors available.



PQube File Formats

Your PQube provides data in several useful formats.

- Events, trends, and statistics as universal GIF formats and .CSV data files
- Text, XML and HTML summaries
- PQDIF files (IEEE standard for power quality data files)

Each graph and chart is labeled in two languages (28 languages total).

All PQube graphs are generated by your PQube directly, without software, and can be viewed in a browser or opened in any picture viewer. They are included in event notification emails as simple GIF file attachments, and can be forwarded to a third party, such as a facility engineer or utility company.

You can see more graphs like these at map.PQube.com—free PQube data streamed live from around the globe.



PQube®
Power Standards Lab

Gonsel's Machine Shop PQube #2 - 6
Measuring power at service entrance
In back of machine shop

Status

Meters
Events
Trends/Statistics
Commands
Network

PQube Information

Location: Gonsel's Machine Shop #2
 PQube ID: Gonsel's Machine Shop PQube #2
 Note 1: Measuring power at service entrance
 Note 2: In back of machine shop
 PQube Serial Number: P002058
 Model Number: PQube 01-0000
 Firmware Version: 1.4.5 #2187
 IP Address: 192.168.2.50

Configuration

Power Configuration: Delta
 Nominal Line-to-Line Voltage: 240V
 Nominal Frequency: 60Hz
 Current Transformer Ratio: 300:5

PQube Time

Date: 2011/05/27
 Day of Week: Friday
 Time: T 10:22:50 PST

Data from the PSL PQube® by www.PowerStandards.com

The PQube web interface access screen. From here, you can check your PQube status, access the meters, view events, and give commands to your PQube. Each PQube can be labeled with a unique name and location, making it easy to monitor multiple PQubes.

An overview of a PQube meters screen. All data refreshes on click. Clicking the Events and Trends/Statistics links allows you to see the most important parts of this data in visual form (see following pages).



PQube®
Power Standards Lab

Gonsel's Machine Shop
Measuring power at service entrance
In back of machine shop

Status

Meters
Events
Trends/Statistics
Commands
Network

Meters

Meter	Value	
L1-L2	238.2V	
L2-L3	237.2V	
L3-L1	235.1V	
L1 Amp	34.6A	
L2 Amp	52.1A	
L3 Amp	75.0A	
Frequency	59.994Hz	
Voltage THD	2.1%	
Current TDD	1.7%	
RMS Flicker	P _{inst}	0.1
	P _{ST}	0.3
	P _{LT}	0.3
IEC Zero Sequence V	0.0%	
IEC Negative Sequence V	0.7%	
IEC Zero Sequence I	13.1%	
IEC Negative Sequence I	31.0%	
TH1 Probe 1	10.74deg C	
TH1 Probe 1	64.8% RH	
L1-N Voltage Fundamental	136.4V 0deg	
L2-N Voltage Fundamental	137.7V -121deg	
L3-N Voltage Fundamental	135.9V 119deg	
L1 Current Fundamental	34.3A -27deg	
L2 Current Fundamental	51.7A -131deg	
L3 Current Fundamental	74.7A 94deg	
User Counter (since 2010/03/10)	281474976710656	
Energy Per Count	0.000Wh	

Energy

Meter	Value
Power	20.43kW
Apparent Power	22.11kVA
Reactive Power	8.45kVAR
True Power Factor	0.92
Energy (since 2010/03/10)	88.645MWh
Apparent Energy (since 2010/03/10)	106.270MVAh
Carbon (since 2010/03/10)	28.730Mg

Peak RMS Current (since 2010/03/10)	1 cycle	307.3Arms
	1 minute	172.2Arms
	15 minute	100.1Arms
Peak Power (since 2010/03/10)	1 cycle	85.05kW
	1 minute	30.51kW
	15 minute	26.01kW
Peak Apparent Power (since 2010/03/10)	1 cycle	105.68kVA
	1 minute	47.99kVA
	15 minute	30.13kVA

Harmonic H5

Meter	Value	
L1 Harmonic H5	1.6V	98deg
	1.5A	89deg
L2 Harmonic H5	1.8V	208deg
	2.5A	203deg
L3 Harmonic H5	2.0V	338deg
	2.1A	338deg



NO SOFTWARE REQUIRED

NO SOFTWARE REQUIRED


PQube-generated waveform and RMS graphs of a voltage sag recorded at a machine shop. The graphs give you the time, depth, and duration of the event, and a snapshot of your power at the beginning and end of the event. You don't need any special software to create or read the graphs.

With PQube-generated graphs like this you can:

- Prove to your utility that a sag happened
- Rule out power problems during troubleshooting—by showing that no events occurred
- Identify the source of your power problems
- Understand how your equipment affects the power in your facility.



PQube Sample Files

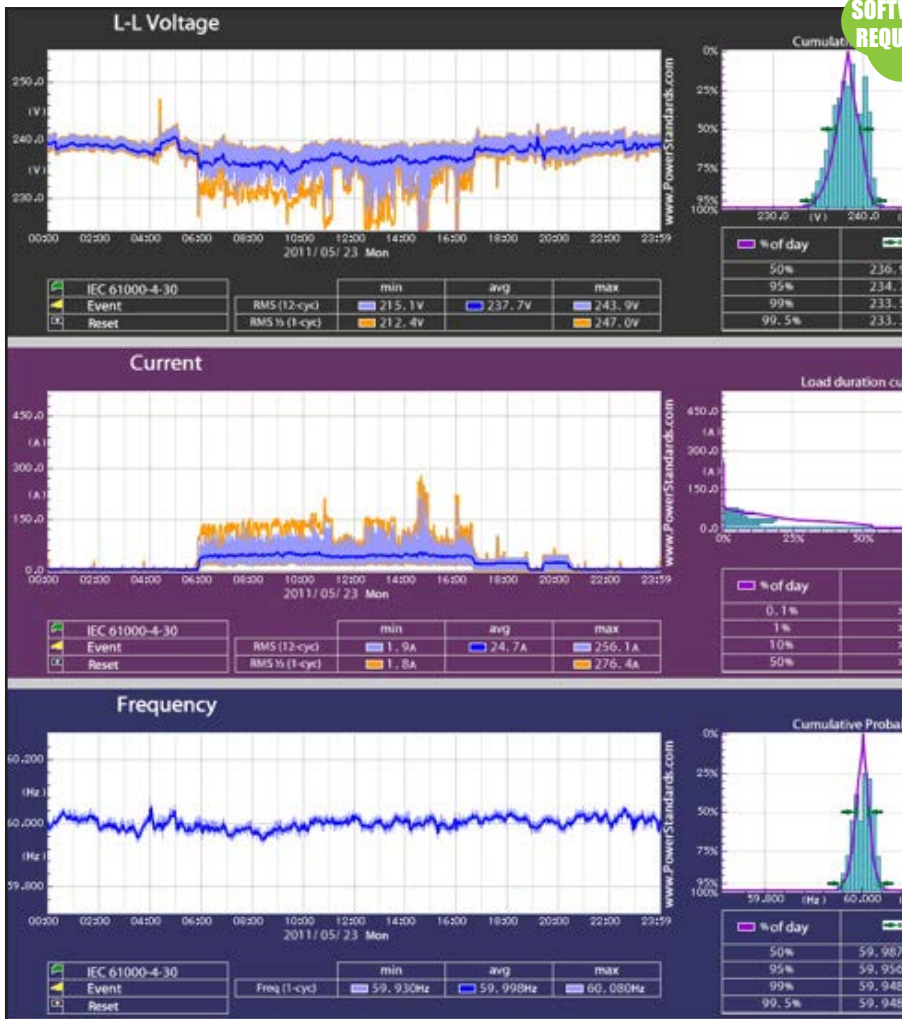


NO SOFTWARE REQUIRED




A PQube-generated daily trend summary with min/avg/max values and statistics.

A daily unbalance graph. Unbalance can be a persistent and difficult-to-detect cause of equipment failure and energy loss.

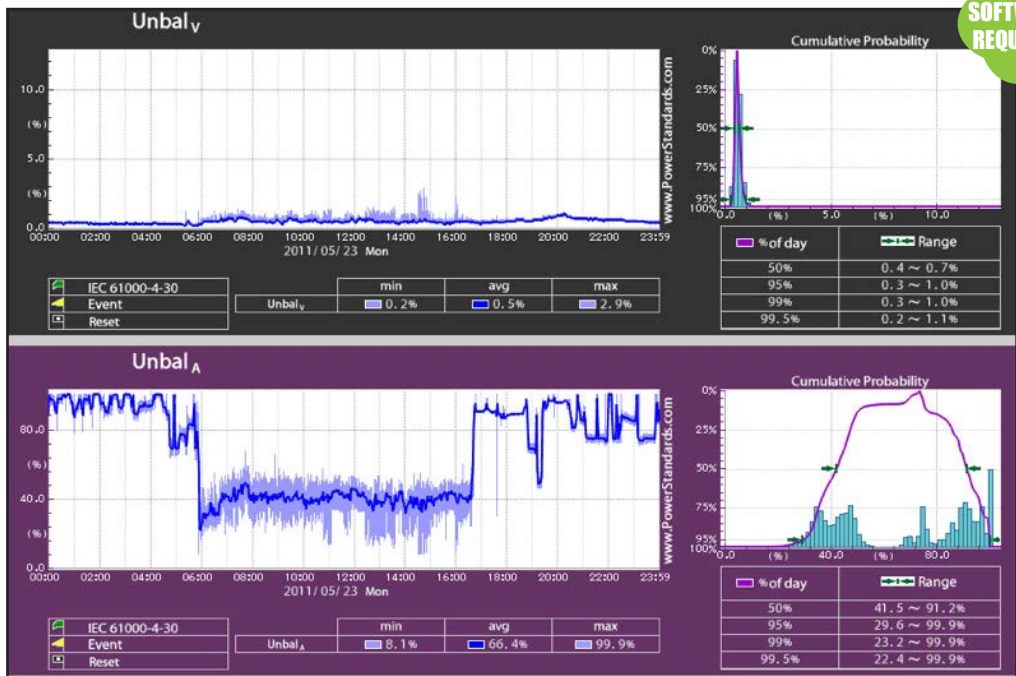


NO SOFTWARE REQUIRED

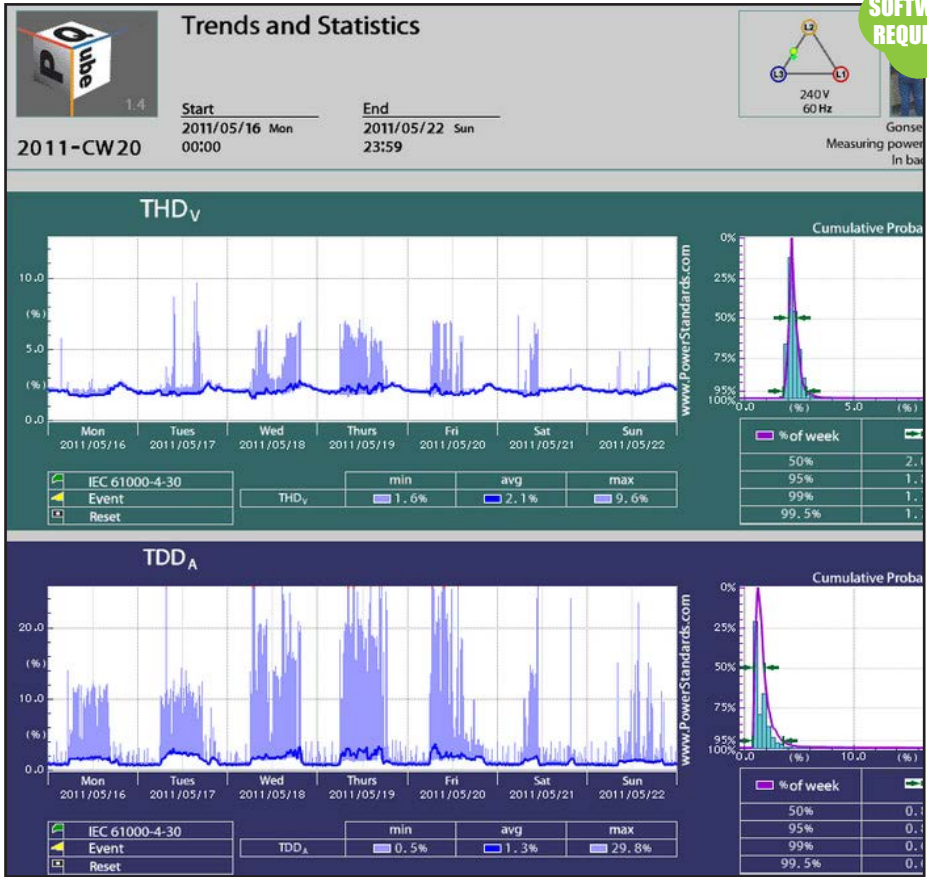

Weekly harmonics distortion graph for voltage and current. Voltage harmonics can pollute the grid and affect other loads. Current harmonics increase losses in transformers and wiring. High current harmonics will distort the voltage, which can affect your loads.

A "harmonic profile" snapshot. Identify exactly which harmonic is causing problems. Harmonic snapshots can be generated from the PQube on demand, or every 10 or 15 minutes (user-selected).

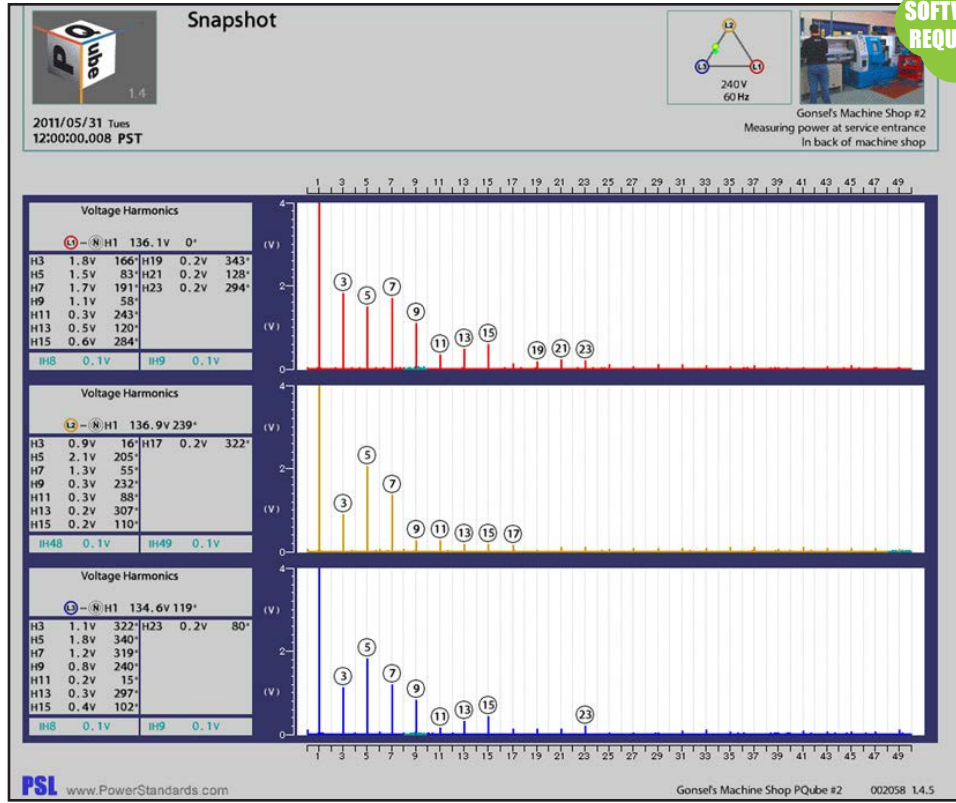

PQube Sample Files



NO SOFTWARE REQUIRED





PQube-generated temperature and humidity graph. Your PQube has two temperature-humidity ports, allowing you to monitor the temperature and humidity at two locations, up to 10 meters away from the meter (with optional PSL extension cables). This is important in applications that are sensitive to environmental conditions, such as photovoltaic plants and data centers.

B	C	D	E	F	G	H	I	J
Seconds	L1-L2 (V)	L2-L3 (V)	L3-L1 (V)	L1 Amp (A)	L2 Amp (A)	L3 Amp (A)	Frequency (Hz)	Power (kW)
-1.067	237.3	236.2	234.5	31.6	46	71.6	59.994	17.54
-1.058	237.4	236.3	234.5	31.8	46.6	71.6	59.994	17.54
-1.105	237.4	236.2	234.6	31.8	46.6	71.5	59.994	17.58
-1.042	237.4	236.2	234.6	31.9	46	71.5	59.994	17.58
-1.033	237.4	236.3	234.6	31.9	46	71.7	59.994	17.56
-1.025	237.4	236.2	234.6	31.9	46.4	71.7	59.994	17.56
-1.017	237.4	236.2	234.6	31.9	46.4	71.6	59.994	17.55
-1.008	237.4	236.1	234.6	31.9	46.4	71.6	59.994	17.55
-1	237.3	236.2	234.6	31.9	46.4	71.5	59.994	17.53
-0.992	237.4	236.3	234.7	31.8	46.6	71.5	59.994	17.53
-0.983	237.4	236.2	234.6	31.8	46.6	71.4	59.994	17.49
-0.975	237.4	236.2	234.6	31.4	46.5	71.4	59.994	17.49
-0.967	237.4	236.3	234.6	31.4	46.5	71.5	59.994	17.5
-0.958	237.4	236.2	234.6	31.5	46.5	71.5	59.994	17.5
-0.95	237.4	236.3	234.6	31.5	46.5	71.6	59.994	17.54
-0.942	237.4	236.2	234.6	31.5	46.4	71.6	59.994	17.54
-0.933	237.4	236.2	234.6	31.5	46.4	71.6	59.994	17.58
-0.925	237.4	236.3	234.6	31.5	46.5	71.6	59.994	17.58
-0.917	237.4	236.2	234.6	31.5	46.5	71.5	59.994	17.47
-0.908	237.4	236.2	234.7	31.6	46.3	71.5	59.994	17.47
-0.9	237.4	236.2	234.7	31.6	46.3	71.6	59.994	17.59

Customize your PQube data. All PQube data is available in .CSV format. You can open these files in any spreadsheet program such as Microsoft Excel® and use it to create your own custom graphs and reports.



NO SOFTWARE REQUIRED

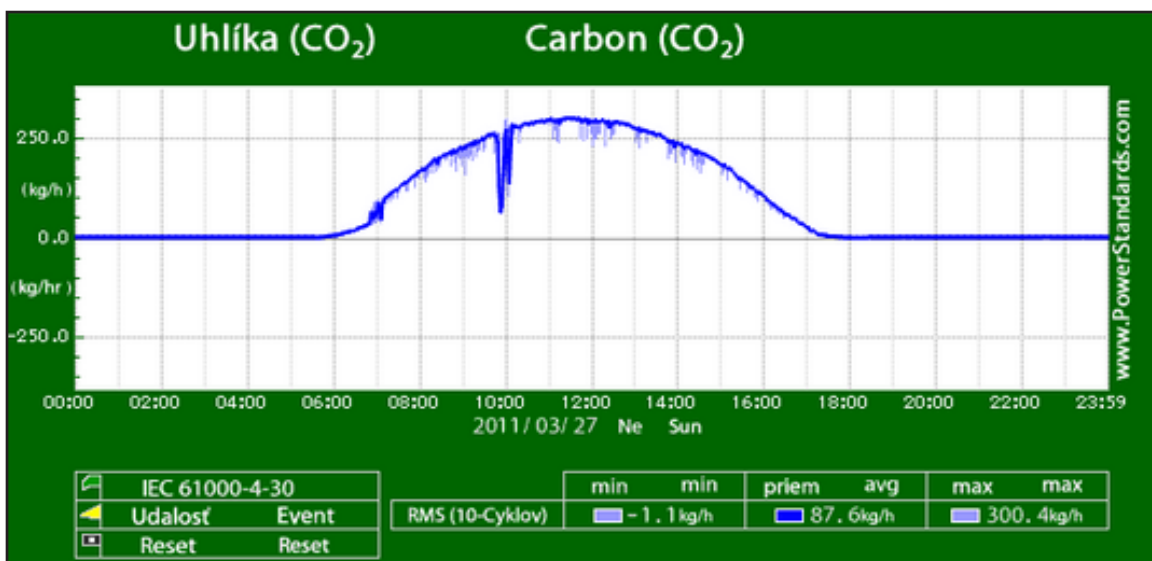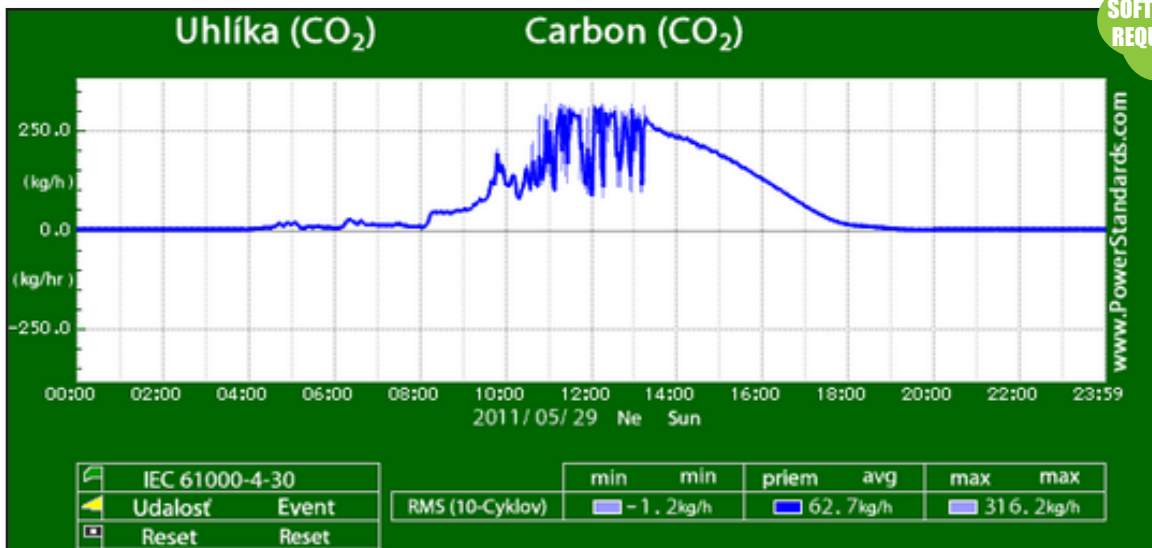

▲ PQube-generated carbon graphs from a PQube monitoring a photovoltaic installation. The graph shows the CO₂ avoided on a cloudy day (top) and a nearly perfect day (bottom).

PQube Sample Files